



## Outdoor Hybrid Cable

### Cable Diagram

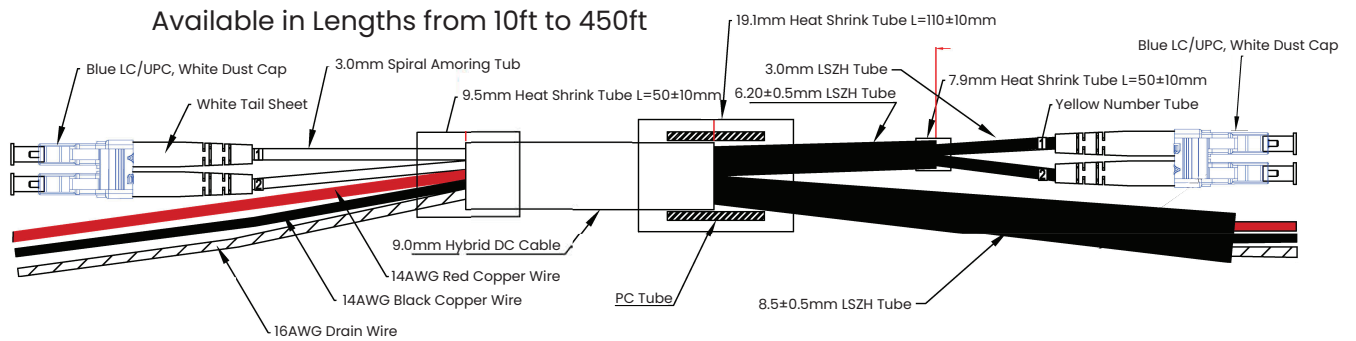

### Cable Cross Section

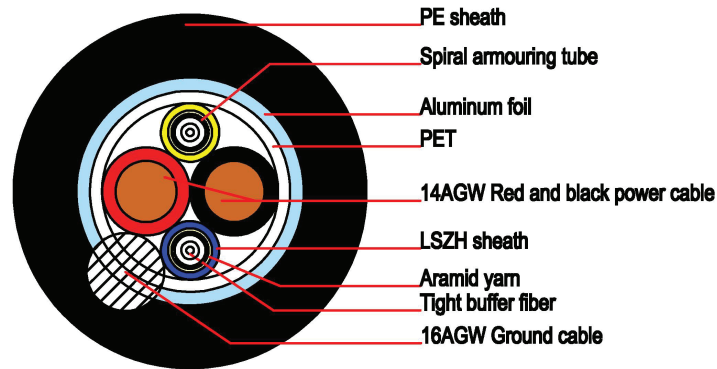

### Technical Parameters

Breakout Tube	PC Tube
Number Tube	Yellow Number Tube
Heat Shrink Tube	9.5/7.9mm (.37/.31in)
Heat Shrink Tube	19.1mm (.75in)
LSZH Tube	8.5/6.0mm (.33/.24in)
Armored Tube	3.0mm (.12in)
Ferrule	LC/UPC
Parts	LC/UPC SM DX 3.0mm (.12in)
Cable	9.0mm (.35in) GD 14AWGx2+16AWG Cable Black G.657.A1